





Air Humidity Control

Air Dehumidifier DFRA-1300-E

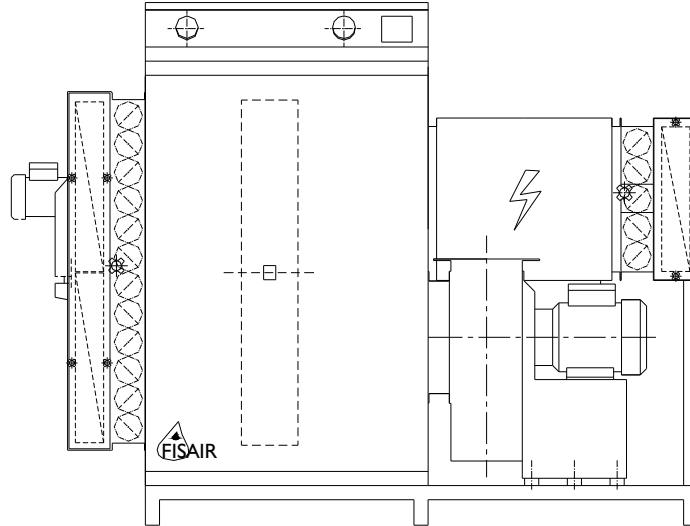

TECHNICAL DATA - SHEET

TECHNICAL DATA	
PROCESS/DRY AIR FLOW	9000 m ³ /h
AVAILABLE PRESSURE FOR DUCTING	300 Pa
REACTIVATION AIR FLOW	2700 m ³ /h
AVAILABLE PRESSURE FOR DUCTING	600 Pa
NOMINAL DRYING CAPACITY(*)	58 kg/h
TOTAL POWER SUPPLY	108.8 kW
MOTORS POWER	9.8 kW
REACTIVATION HEATER POWER	99 kW
ELECTRICAL SUPPLY	400V/III/50 Hz

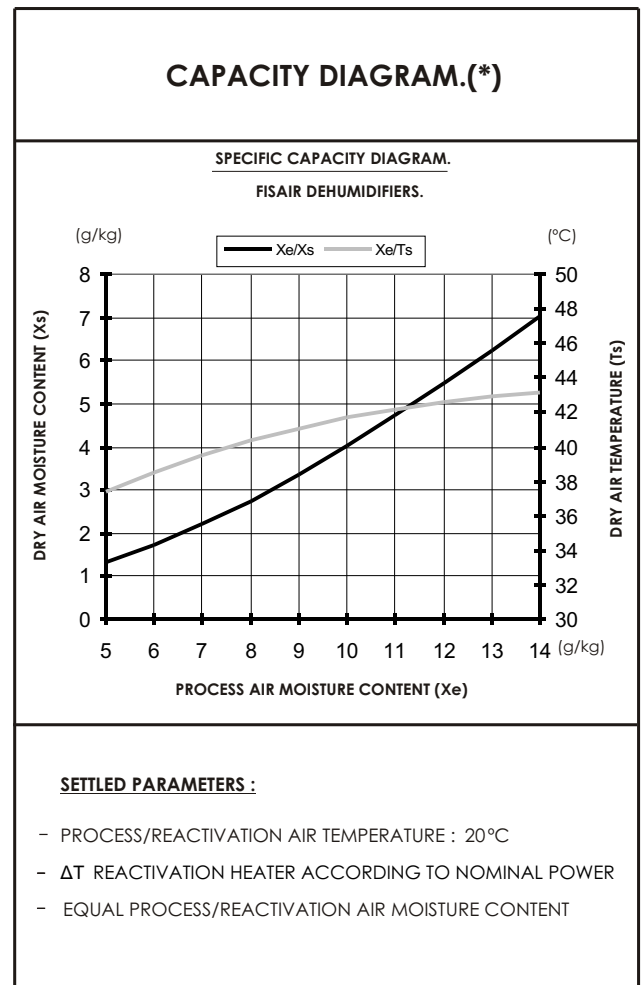

04/04 F-00610-02/B

(*) Nominal capacity: 20°C and 60% R.H.

(*) At other operating conditions.pls.ask for the corresponding performances.


FISAIR AIR DEHUMIDIFIERS

SPECIFICATION :

Air dehumidifier by silicagel desiccant rotor, brand FISAIR, model DFRA-1300-E manufactured in a self-supporting and compact unit with :

- Casings in galvanized steel plate with phosphate priming coat and combined RAL 6018/6019 enamel finish (under demand, AISI 304 stainless steel).
- Rotor reactivation air heater by electrical S.S.shielded resistances rative and safety thermostatic cut-outs.
- Centrifugal air fans, single ear, forward (optionally backwards) blades, direct driven type, made of galvanized (optionally stainless) steel.
- Air flows control dampers made of aluminium.
- V-Shaped filter. Mats G4 (optionally higher efficiency) quality.
- Electric control box with mains isolator switch and electric components protections. Control voltage 24 VAC.
- PLC MFD-TITAN microprocessor with LCD display for the dehumidifier operative management and supervision. PLC allows to choose between proportional operation, stage operation or on/off operation.
- Performance datas, power supply and connection to mains to be specified individually.

OVERALL DIMENSIONS :

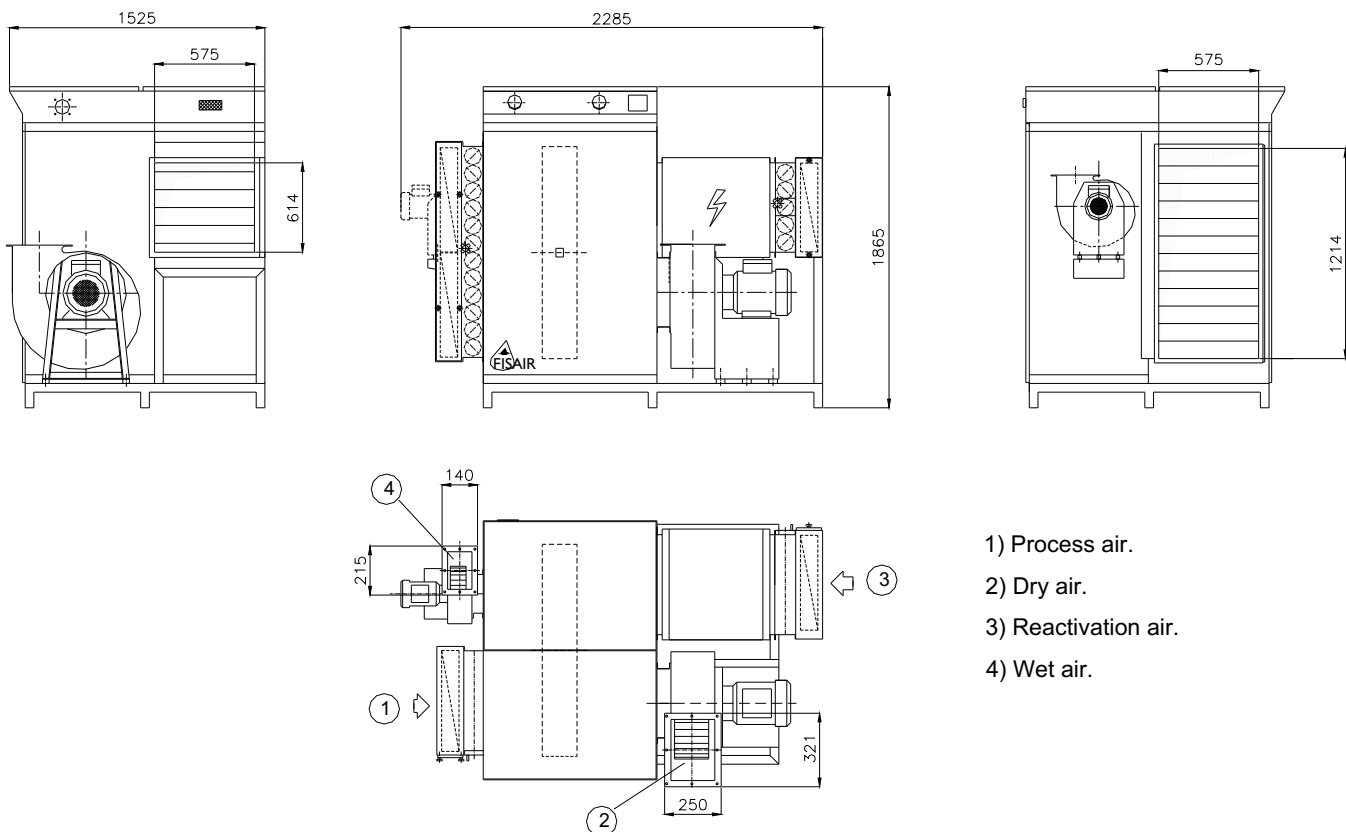

NOTE : - Aproximative weight: 750 kg.
- Dimensions in mm.



FISAIR, S.L.
Uranio,20 - Pl. AIMAYR
28330 San Martin de la Vega
MADRID (SPAIN)

☎ +34-91 692 15 14 - 📠 +34-91 691 64 56
e-mail : info@fisair.com
www.fisair.com

DISTRIBUTOR :

AB KLIMATIZACE®

AB Klimatizace, s.r.o., Bráfova 9a, 616 00 Brno
tel.: 541 215 445, 737 285 067 fax: 541 240 799
www.abklimatizace.cz obchod@abklimatizace.cz